
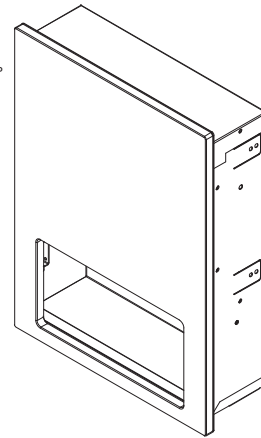
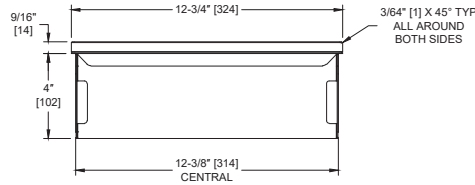


**PIATTO™ COMPLETELY RECESSED PAPER TOWEL DISPENSER – White Phenolic Door**

Paper Towel Dispensers

Piatto

MasterFormat Section 10 28 13

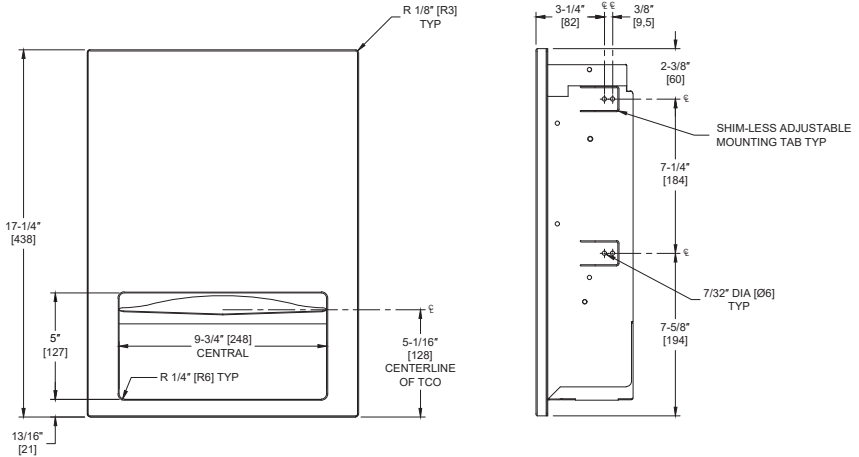

Scan for Information



**SUSTAINABILITY/LEED**

MR 4.1 (1) MR 6 (1) EQ 4.2 (1)  
MR 4.2 (1) EQ 4.1 (1) EQ 4.4 (1)

**NOTE:**  
ALL DIM'S INCH [MM]  
ILLUSTRATION FOR REF ONLY AND NTS  
FOR CLEANING INSTRUCTIONS SEE APPROPRIATE SECTIONS IN  
PRODUCT CARE & MAINTENANCE BULLETIN (PCM) ON ASI WEBSITE

**PRODUCT OVERVIEW**

This sophisticated paper towel dispenser cabinet is designed to be completely recessed into the plane of the washroom wall, highlighting the seamless design that defines Piatto™. The phenolic door is attached to the cabinet using field-adjustable, furniture quality hinges and is secured shut by an internal spring-loaded latch. All hardware is concealed giving the Piatto™ Collection its minimalist appeal. Well-suited for the smaller washroom with less space and traffic, this unit dispenses 350 C-fold or 475 multi-fold paper towels. Towels are self-feeding until supply is depleted. Unit may be reloaded with a partial load in-place and will continue to feed properly.

**KEY FEATURES & SPECIFICATIONS**

- Designed to be completely recessed with no protrusion from the wall at all
- White phenolic door unique to Piatto™ adds elegance
- Furniture style hinges are field adjustable to ensure perfect fit - All metal parts are made of Type 304 Stainless Steel
- All metal parts are made of Type 304 Stainless Steel
- All hardware, including the latch, is concealed
- Manual
- Fits with virtually no gap into a finished wall opening

**OPERATION & MAINTENANCE**

Towels are self-feeding until supply is depleted. Unit may be reloaded with a partial load in-place and will continue to feed properly. Locking door prevents unauthorized access or removal.

**TECHNICAL INFORMATION / PRODUCT PROPERTIES**

Property	Value
Dimensions	12-3/4" [324] W x 17-1/4" [438] H x 4-9/16" [116] D
Construction	Type 304 Stainless Steel Frame w/White Phenolic Door Furniture style hinges are field adjustable to ensure perfect fit
Power	N/A
Operation	Manual - Pull Type
Mounting	Concealed Mounting
Capacity	Fits with virtually no gap into a finished wall opening

**INSTALLATION**

Mount unit in wall recess using four (4) #10 x 1-1/2" [M5x38] self-threading Pan Head screws (by others) through concealed mounting holes provided in Shim-less adjustable mounting tabs. For compliance with 2010 ADA Accessibility Standards install unit so that towel dispenser outlet is 48" [1219] maximum above finished floor (AFF). For general utility mount unit 50" [1268] AFF to bottom of unit. See OM & IG for complete installation instructions packed with unit.

Finished Wall Opening (FWO) required is 12-13/16" [325] W x 17-5/16" [440] H x 4-3/4" [121] D minimum

**WARRANTY**

One (1) Year from date of Invoice