


Profile Collection Waste Receptacle – Recessed

Waste Receptacles

Profile

MasterFormat Section 10 28 13

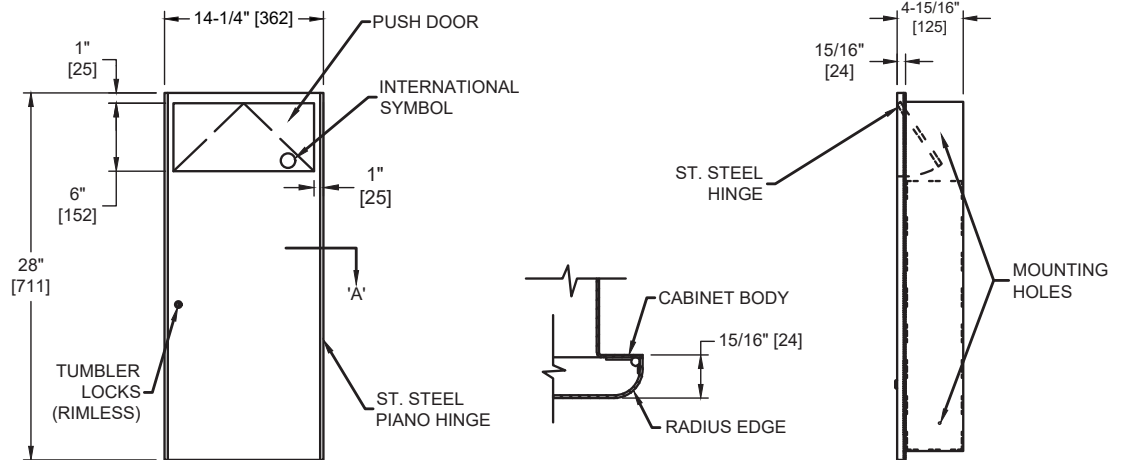

Scan for Information



SUSTAINABILITY/LEED

MR 4.1 (1) MR 6 (1) EQ 4.2 (1)
MR 4.2 (1) EQ 4.1 (1) EQ 4.4 (1)

NOTE:
ALL DIM'S INCH [MM]
ILLUSTRATION FOR REF ONLY AND NTS

PRODUCT OVERVIEW

Stainless steel waste receptacle holds 4.5 gal. (17 L) of waste and has a self-closing panel that covers its opening. Waste container is emptied manually. Keyed tumbler lock prevents unauthorized access or removal. Full face door shall be formed from one piece of 16 gauge alloy 18-8 type 304 stainless steel, cabinet shall be 20 gauge same grade stainless steel.

KEY FEATURES & SPECIFICATIONS

- Robust 16 gauge Stainless Steel face
- Curved (radius) edges add elegance
- Type 304 Stainless Steel - Satin Finish
- Recessed
- 4.5 Gal. (17.0 L) Waste Capacity

OPERATION & MAINTENANCE

Waste container is emptied manually on cycle determined by maintenance requirements. Keyed tumbler lock prevents unauthorized access or removal.

TECHNICAL INFORMATION / PRODUCT PROPERTIES

Property	Value
Dimensions	14-1/4" [362] W x 28" [711] H x 4-15/16" [125] D
Construction	Type 304 Stainless Steel - Satin Finish
Mounting	Recessed
Capacity	4.5 Gal. (17.0 L) Waste Capacity

INSTALLATION

For compliance with 2010 ADA Accessibility Standards, install unit with top edge no higher than 48" [1219] Above Finished Floor (AFF).. Note that top of RWO is 3/4" [19] below top of unit. Typical suggested mounting height is bottom of unit 24" [610] AFF.

Rough Wall Opening (RWO) required is 12-3/4" [324] W x 26-1/2" [673] H x 4-1/4" [108] D minimum

OPTIONS

N/A

WARRANTY

One (1) Year from date of Invoice