


**Mop Rack (3 Holders) 26" – Surface Mounted**

Custodial Accessories

MasterFormat Section 10 28 13

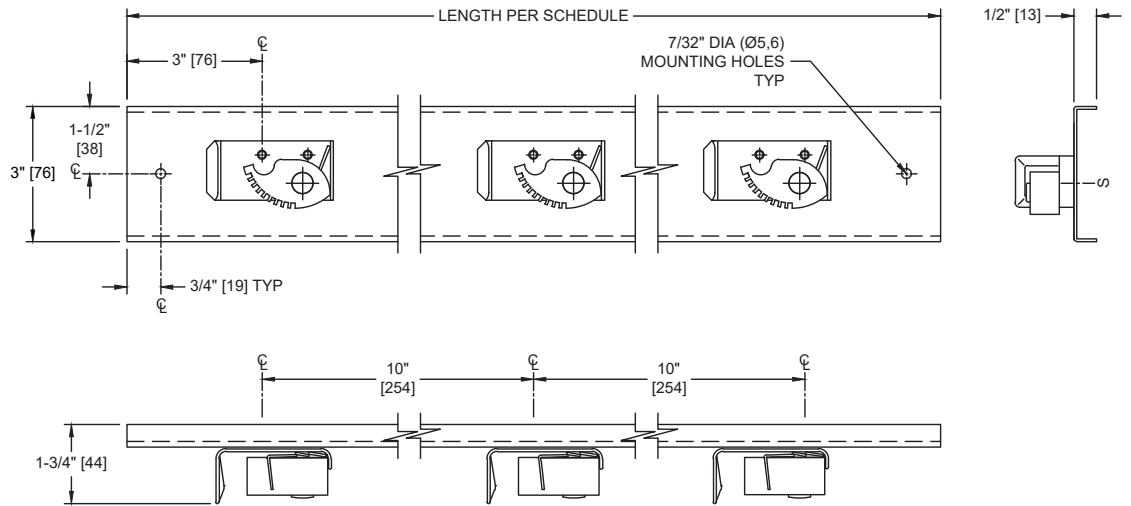

Scan for Information



**SUSTAINABILITY/LEED**

MR 4.1 (1) MR 6 (1) EQ 4.2 (1)  
MR 4.2 (1) EQ 4.1 (1) EQ 4.4 (1)

**NOTE:**  
ALL DIM'S INCH [MM]  
ILLUSTRATION FOR REF ONLY AND NTS

**PRODUCT OVERVIEW**

Formed channel fabricated of 20 gauge, type 304 stainless steel with satin finish. Projects 1/2" [13] from the wall. Holders have serrated rubber cams for grasping. Includes 3 holders, 26" [660] long. Brackets shall be fabricated of cadmium plated steel and shall be ribbed for rigidity.

**KEY FEATURES & SPECIFICATIONS**

- 3 Holders
- Pivoting spring loaded holders have serrated rubber cams for grasping.
- Type 304 Stainless Steel - Satin Finish
- Surface Mounted
- 26" [660] Length

**OPERATION & MAINTENANCE**

Mop or broom handle is pushed into grip-jaw of pivoting serrated rubber cam with upward motion until it seats behind rib on clamp plate. Spring holds cam against handler. Gravity holds mop clamped in position.

**TECHNICAL INFORMATION / PRODUCT PROPERTIES**

| Property     | Value  |
|--------------|--|
| Dimensions   | 26" [660] W x 3" [76] H x 1-3/4" [44] D                          |
| Construction | Type 304 Stainless Steel - Satin Finish                          |
| Mounting     | Surface Mounted  |
| Capacity     | Holds round three (3) handles of 7/8" [Ø22] to 1-1/4" Dia. [Ø32] |

**INSTALLATION**

For general utility mount rack 70" [1778] Above Finished Floor (AFF) from bottom of rack with #10 self-threading pan head screws (by others) through holes provided in channel. For compliance with 2010 ADA Accessibility Standards, install unit so that top of rack is 48" [1219] maximum AFF.

**WARRANTY**

One (1) Year from date of Invoice