


Mop Rack (4 Holders) 36" – Surface Mounted

Custodial Accessories

MasterFormat Section 10 28 13

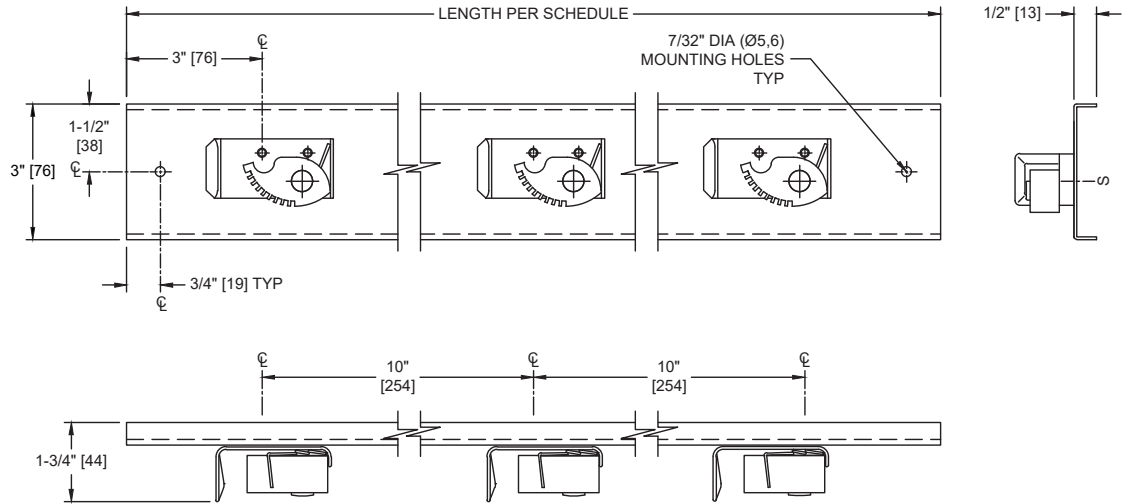

SUSTAINABILITY/LEED

MR 4.1 (1) MR 6 (1) EQ 4.2 (1)
MR 4.2 (1) EQ 4.1 (1) EQ 4.4 (1)

NOTE:
ALL DIM'S INCH [MM]
ILLUSTRATION FOR REF ONLY AND NTS

PRODUCT OVERVIEW

Formed channel fabricated of 20 gauge, type 304 stainless steel with satin finish. Projects 1/2" [13] from the wall. Holders have serrated rubber cams for grasping. Includes 4 holders, 36" [914] long. Brackets shall be fabricated of cadmium plated steel and shall be ribbed for rigidity.

KEY FEATURES & SPECIFICATIONS

- 4 Holders
- Pivoting spring loaded holders have serrated rubber cams for grasping.
- Type 304 Stainless Steel - Satin Finish
- Surface Mounted
- 36" [914] Length

OPERATION & MAINTENANCE

Mop or broom handle is pushed into grip-jaw of pivoting serrated rubber cam with upward motion until it seats behind rib on clamp plate. Spring holds cam against handler. Gravity holds mop clamped in position.

TECHNICAL INFORMATION / PRODUCT PROPERTIES

| Property | Value |
|--------------|---|
| Dimensions | 36" [914] W x 3" [76] H x 1-3/4" [44] D |
| Construction | Type 304 Stainless Steel - Satin Finish |
| Mounting | Surface Mounted |
| Capacity | Holds round four (4) handles of 7/8" [Ø22] to 1-1/4" Dia. [Ø32] |

INSTALLATION

For general utility mount rack 70" [1778] Above Finished Floor (AFF) from bottom of rack with #10 self-threading pan head screws (by others) through holes provided in channel. For compliance with 2010 ADA Accessibility Standards, install unit so that top of rack is 48" [1219] maximum AFF if clear floor access is provided.

WARRANTY

One (1) Year from date of Invoice